

KATSV 55 BLUE-MAG · SENSOR · TWIN-RAIL SLIDE

PROFESSIONAL

EUROPE-VERSION

230 VOLTS

USA-VERSION

110 VOLTS

UK-VERSION

110 VOLTS

20 8026 010

20 8026 020

20 8026 030


Core drilling



Ø 5/32 to 2-11/64"
12-55 mm

302-429, 448-462

Twist drilling



Ø 3/16 to 29/32"
3-23 mm

568

Countersinking



Ø 3/8 to 1-37/64"
10-40 mm

610-645


Tapping



Ø 15/64 to 25/32"
6-20 mm

569

Accessories



463-465, 470

Speed full load




Gear stages

1 = 100-250 rpm

2 = 180-450 rpm

The specified maximum diameter / cutting depths of the magnetic hole cutting machines, can only be guaranteed with **original** Karnasch drilling tools.

* The machines are supplied as standard with a **2" (55 mm) cutting depth holder**. For **cutting depth up to 4" (110 mm)** please use our extra long holders see pages 464/465, or see our 2-part pins (explanation see page 310) for cutters from 45/64" (18 mm). For cutting depth more than 4" (110 mm) please ask us.

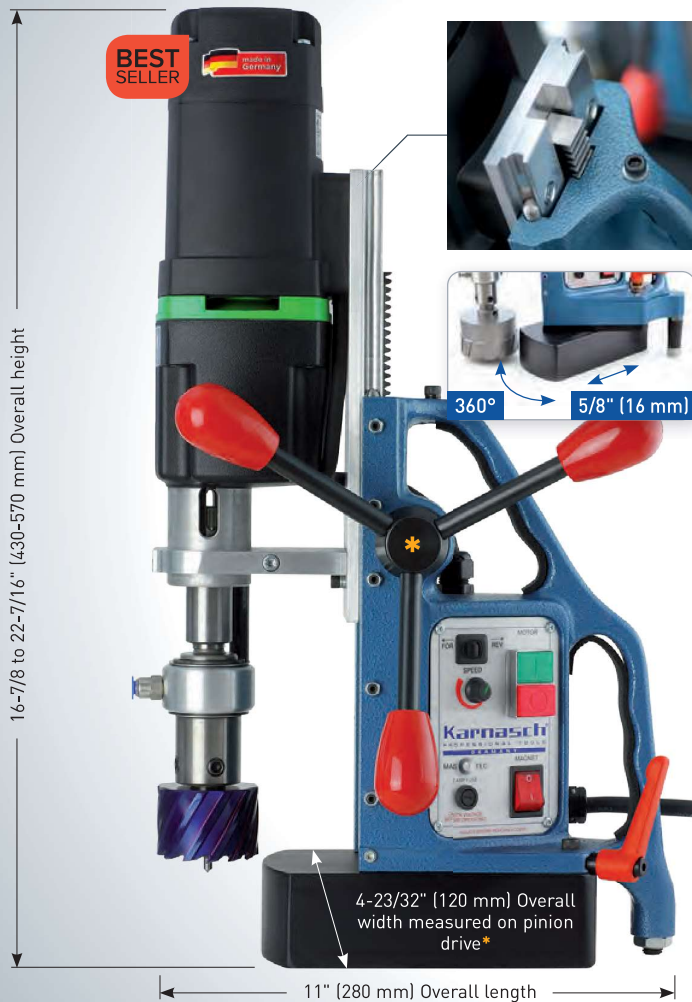

Constant torque forward and reverse **with built in time delay** for motor start. Gives motor and gearbox protection when switching from forward to reverse when tapping or reaming.

Special Characteristics



Right/left running



Full wave electronic



Thermal/overheat protection



Sensor

Thanks to the Heavy Duty Twin Rail Slide System, **4" (110 mm)** cutting depth is easily possible. (Description on page 1158).

Motor Power Watts

1250

Tool holder

Morse taper 2 with Weldon 3/4" (19 mm)

Coolant supply

Internal, automatically

Stroke

7-7/8" | 195 mm

Voltage

110 Volts / 230 Volts

Magnetic adhesion

2755 lb | 1250 kg

Magnetic foot

3-5/16 x
7-1/16"
(85 x 180 mm)

Rotates 360°, moveable 5/8" (16 mm) forward & backwards

Weight

29.80 lb

13.50 kg

Movie



Bestseller

